


Technical Features



Symbolic Picture

Cabinet Type	Stand (ST)		
Top Light	Without Topper: Candle (vertical, 3 colours) or Classic (vertical, 2 colours) With Topper: Game light (horizontal, 3 colours)		
Topper	With 27" or 32" TFT Monitor		
Monitor	2 TFT 27" (16:9) 1x PCAP Touch		
Cash Handling			
Bill Validator	JCM UBA-1x-SS, JCM iVIZON-100-SS, MEI SCNxx (Cashflow)		
Bill Dispenser	NV200 + Smart Payout, JCM UBA-10-SH2-RC		
Coin Validator	NRI G-13.mft		
Hopper	Up to 2: Universal MK4 With Ticket Printer Ithaca EPIC 950 or JCM GEN 5: only 1 Universal MK4		
Ticket Printer	Ithaca EPIC 950, JCM GEN 5 Betting Terminal: EP802-TMP		
Player Tracking	Available and customisable		
Mainboard	Platform	Abbr.	Game Content
	COOLFIRE™ II-s	CF2S	
	FireFox II	FF2	NOVO LINE™, Prime, Pro
	Novo PCe G-Rex	NPCe	Windows Embedded Standard
	Quono LNX		Linux
Player Panel	With buttons		
Sound	2 full range loudspeakers and 1 subwoofer		

Technical Data

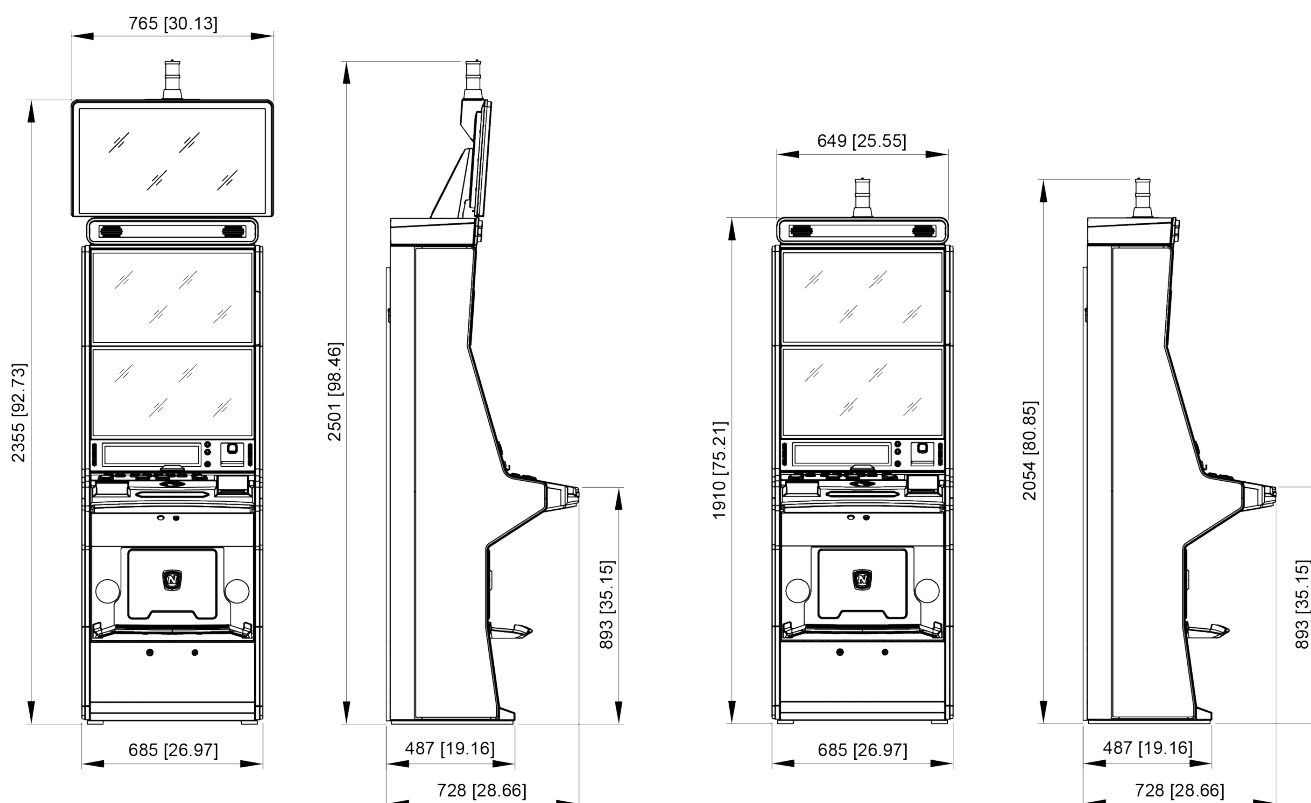

Machine Type	FV637C
Dimensions in mm [in]	Width (without Topper): 685 [26.97] Width (with Topper): 765 [30.13] Depth: 728 [28.66]
With Topper and Top Light Classic	Height: 2501 [98.46]
With Topper and without Top Light	Height: 2355 [92.73]
Without Topper and with Top Light Classic	Height: 2054 [80.85]
Without Topper and without Top Light	Height: 1910 [75.21]
Power Supply	230 V / 50 Hz / 1.8 A
Power Consumption	300 W
Ambient Temperature	10 – 35° C
Ambient Humidity	30 – 80 % (non-condensing)

General Disclaimer

All technical information contained in this data sheet has been developed and compiled with great care and is subject to change without notice. NOVOMATIC AG reserves the right to make changes to this data sheet at any time and gives no guarantee and accepts no legal responsibility (neither as a liability nor in any other way) for any errors and consequences that may arise from incorrect statements or incorrect use. © NOVOMATIC 11 2019

